

## QUARTER-TURN ELECTRIC ACTUATOR


Model No.	Power (Watts)	Torque (Nm)	Speed (Sec/90°)	Weight (Kgs)	Manual Override	Operation Voltage	
						Single-phase	Three-phase
BM-2	40W	120	8	4.5	N/A	AC 110V/220V	220V/380V/440V
OM-A	10W	50	20	3.0	N/A	AC 110V/220V*	N/A
OM-1	10W	35	12	2.0	Lever	AC 110V/220V*	N/A
OM-2	40W	90	15	11.0	Hand-wheel	AC 110V/220V*	220V/380V/440V
OM-3	40W	150	22	11.0	Hand-wheel	AC 110V/220V*	220V/380V/440V
OM-4	120W	400	16	22.0	Hand-wheel	AC 110V/220V*	220V/380V/440V
OM-5	120W	500	22	22.0	Hand-wheel	AC 110V/220V*	220V/380V/440V
OM-6	120W	650	28	22.0	Hand-wheel	AC 110V/220V*	220V/380V/440V
OM-7	180W	1000	46	36.0	Hand-wheel	AC 110V/220V	220V/380V/440V
OM-8	220W	1500	46	36.0	Hand-wheel	AC 110V/220V	220V/380V/440V
OM-9	180W	2000	58	56.0	Hand-wheel	AC 110V/220V	220V/380V/440V
OM-10	220W	2500	58	56.0	Hand-wheel	AC 110V/220V	220V/380V/440V
OM-11	250W	3000	58	56.0	Hand-wheel	AC 110V/220V	220V/380V/440V
OM-12	300W	3500	58	56.0	Hand-wheel	AC 110V/220V	220V/380V/440V

\*Operating Voltage : DC12V/24V or AC12V/24V

## Modulating Controller

## 比例式控制

It is board inside actuator and supplied.  
 Input signal : 4~20mA , 1~5V , 2~10V.  
 Output signal : 4~20mA , 2~10V.

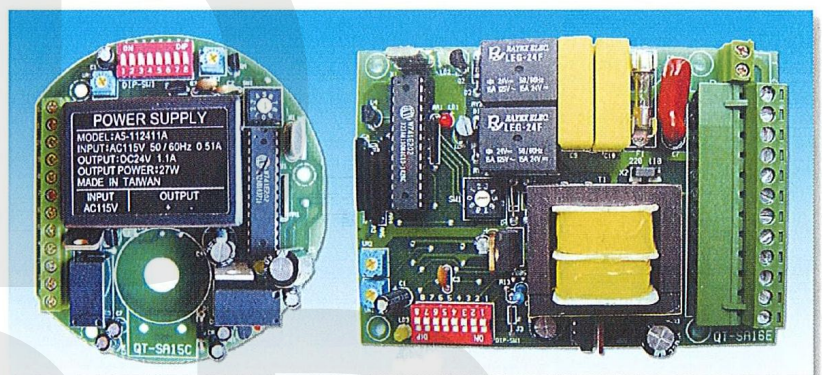

## STANDARD AND DIMENSION DATA

Valve Type	Valve Size (inch)	Valve Material
Screwed Ends Ball Valve	1/2"~3"	SUS316/Bronze/PVC/PP
Screwed Ends Ball Valve	4"	Bronze/PVC/PP
Socket Welded Ends Ball Valve	1/2"~4"	PVC/PP
Flanged Ends Ball Valve	1/2"~12"	Cast Iron/SUS304/SUS316
3-Way Screwed Ends Ball Valve	1/2"~2"	Bronze/SUS316
3-Way Flanged Ends Ball Valve	1"~4"	Cast Iron/SUS304/SUS316
Butterfly Valve	2"~18"	Cast Iron/SUS304/SUS316/PVC/PP

Fluids : Air 、 Water 、 Hot-Water 、 Light-Oil 、 Steam 、 Gas 、 Vacuum Or Other

Agent : [www.autovalve.tw](http://www.autovalve.tw)